


DOUBLE WINDOW SIGHT GLASS

Description:

UTVC: Double window sight glass, are fabricated type window sight glass for application over a wider range of pressure and temperature. Specially designed anti-torque assembly is used in the view glass housing for longer life of the view glass and preventing any kind of damage during installation and replacement of the view glass.

Sight glass is provided with unique in-built deflectors for better visibility of flow. Most suitable for high temperature and pressure application with GMP compliance.

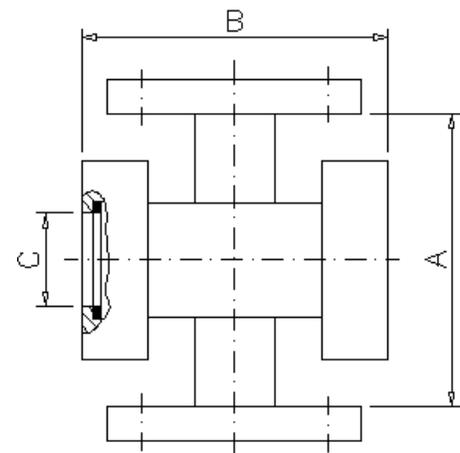

DIMENSIONAL DATA			
SIZE	A	C (clear view)	B
	mm	mm	mm
15NB	125	25	130
20NB	125	25	130
25NB	125	40	130
40NB	125	40	145
50NB	150	60	153
65NB	160	60	172
80NB	185	80	184
100NB	211	100	210
125NB	236	125	236
150NB	289	150	261

Available Sizes:

15,20,25,40,50,65,80,100,125 & 150 NB as standard size.

End Connections: Flanged to ANSI 150# as Standard and other end connections on request.

Limiting conditions:

Max Operating pressure – 21 kg/cm².

Max Temperature – 232 °C.

Cold Hyd. Test Pressure – 42 bars.

BILL OF MATERIAL		
NO	ITEM	MOC
1	BODY	MS /SS304/SS316
2	GLASS	TOUGHENED GLASS
3	GASKETS	PTFE/CAF

True Definition Of Safety And Reliability